


CAMERA


M-CAM 1750 - DIGITAL VIDEO CAMERA 1-CCD

-
- Natural colour reproduction
 - Single chip
 - Anti-moiree-filter
 - High image quality
-

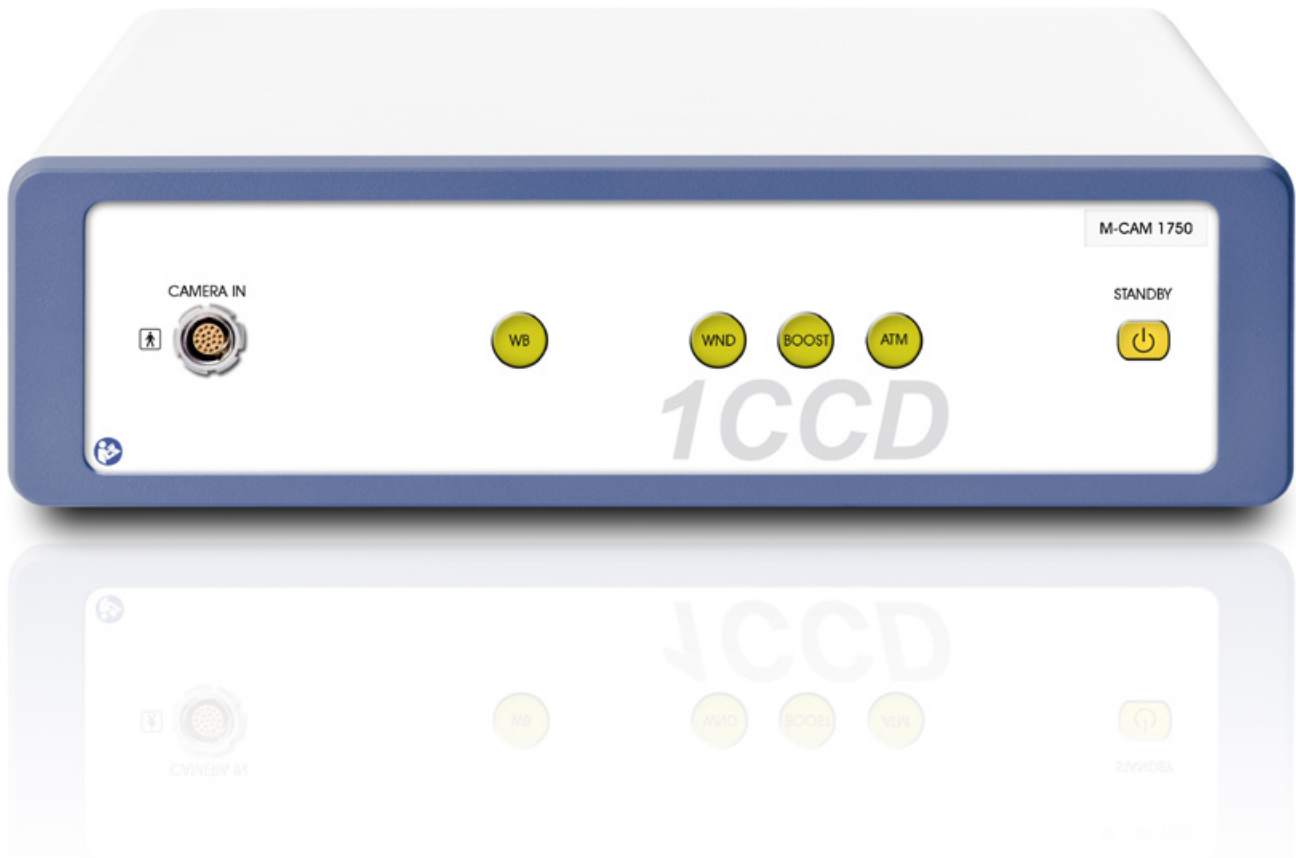

CAMERA

M-CAM 1750 - DIGITAL VIDEO CAMERA 1-CCD



Technical Data

Camera head:	<ul style="list-style-type: none">• Aspect ratio: 4:3• Image sensor: 1/3" CCD• Immersible (using the attached cap)
Voltage range (current consumption):	<ul style="list-style-type: none">• 100-240 V (25 VA)
Frequency:	<ul style="list-style-type: none">• 50-60 Hz
Device protection:	<ul style="list-style-type: none">• 2x T3,15 A
Video System:	<ul style="list-style-type: none">• PAL/NTSC• Image resolution: PAL 752 x 582/ NTSC 768 x 494• TV resolution: > 470 lines• Sensitivity: < 1 lux (1/1.4)• White balance automatically, with data hold• shutter speed PAL (NTSC): 1/50 (1/60) to 1/100.000 sec
Video out terminal	<ul style="list-style-type: none">• 2x Video; 2x S-Video; 1x Y-Pb-Pr (Component); 1x SDI; 1x USB 2.0
Protection class (acc.to IEC 60601-1):	<ul style="list-style-type: none">• I
Safety class:	<ul style="list-style-type: none">• BF
IP code:	<ul style="list-style-type: none">• 20
Standard:	<ul style="list-style-type: none">• IEC 60601-1-2
Device classification (acc. to MDD 93/42/EEC):	<ul style="list-style-type: none">• I
Dimensions (WxHxD):	<ul style="list-style-type: none">• 355mm x 103mm x 253mm
Weight:	<ul style="list-style-type: none">• approx. 4,4 kg
Delivery contains:	<ul style="list-style-type: none">• CCU, camera head with 3,05m (10ft) cable, mains cable, User manual, Y/C cable, BNC cable

Options

Freeze function:	<ul style="list-style-type: none">• Freeze the image via footswitch
------------------	---

M-CAM 1750 camera head



Weight: 80 g
Size: d= 29 mm; l= 55 mm