

LIGHTSOURCE


LED 3000 - HIGH INTENSITY LIGHTSOURCE

- PHASER® Technology Included
- Turret multi connector (optional)
- Low noise, low heat conduction
- Pure daylight quality



LIGHTSOURCE

LED 3000 - HIGH INTENSITY LIGHTSOURCE



Series

Description

LED 3000	Storz adapter, automatic light intensity control
LED 3000	Wolf adapter, automatic light intensity control
LED 3000	Olympus adapter, automatic light intensity control
LED 3000 T	Turret adapter, automatic light intensity control


Technical Data

Light guide connection:

• Storz, (standard connection):



• Turret, multi connector (optional):

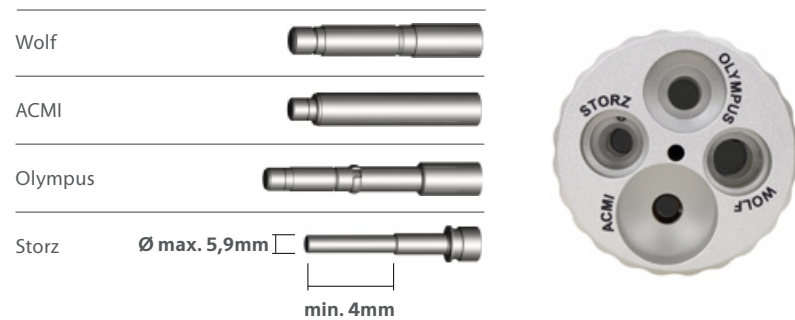

Exclusively pictured version!

Lamp

• Daylight quality, 6000 K (+/-500 K)
• Lifetime: ≤30.000 hr

Voltage range (current consumption):

• 100-240 V (130 VA)

Frequency:

• 50-60 Hz

Device protection:

• 2x T6,3 A

Video In:

• 1x Video

Protection class (acc.to IEC 60601-1):

• I

Safety class:

• BF

IP code:

• 20

Standard:

• IEC 60601-1-2

Device classification (acc. to MDD 93/42/EEC):

• I

Dimensions (WxHxD):

• 355mm x 120mm x 340mm

Weight:

• approx. 10 kg

Delivery contains:

• Light source, mains cable, user manual, BNC cable